



## A SLOTTED STACKED WIDEBAND MICROSTRIP PATCH ANTENNA WITH SQUARE SHAPED PARASITIC ELEMENT

KUSHWAHA R.S.<sup>1\*</sup>, SRIVASTAVA D.K.<sup>1</sup> AND SAINI J.P.<sup>2</sup>

<sup>1</sup>Department of Electronics and Communication Engineering, BIET Jhansi- 284001, UP, India.

<sup>2</sup>Madan Mohan Malviya Engineering College, Gorakhpur-273 010, UP, India.

\*Corresponding Author: Email- ramsinghkushwaha@rediffmail.com

Received: May 16, 2012; Accepted: October 11, 2012

**Abstract-** A new, compact, simple and slotted wideband microstrip patch antenna with stacked configuration is presented in this paper. The antenna is printed on a dielectric substrate and directly fed from a 50  $\Omega$  microstrip line. Using IE3D software package of Zeland, according to the set size, the antenna is simulated. The composite effect of integrating these techniques and by introducing the novel slotted patch offers a low profile, wide bandwidth, high gain and compact antenna element. The computer simulation results show that the antenna can realize wide band characters. With adjusted parameters, it exhibits a broad impedance bandwidth (VSWR  $\leq 2$ ) of about 59% (2.052 GHz-3.754 GHz).

**Keywords-** Confusion matrix, Data Mining, Decision tree, Neural Network, stacking ensemble, voted perceptron

**Citation:** Kushwaha R.S., et al. (2012) A Slotted Stacked Wideband Microstrip Patch Antenna with Square Shaped Parasitic Element. World Research Journal of Ad Hoc and Ubiquitous Computing, ISSN: 2320-3382 & E-ISSN: 2320-5660, Volume 1, Issue 1, 2012, pp.-01-03.

**Copyright:** Copyright©2012 Kushwaha R.S., et al. This is an open-access article distributed under the terms of the Creative Commons Attribution License, which permits unrestricted use, distribution and reproduction in any medium, provided the original author and source are credited.

### Introduction

The rapid development of wireless communication systems has increased the demand for compact microstrip antennas with high gain and wideband operating frequencies. Microstrip patch antenna has advantages such as low profile, conformal, light weight, simple realization process and low manufacturing cost. However, the general microstrip patch antennas have some disadvantages such as narrow bandwidth etc. Enhancement of the performance to cover the demanding bandwidth is necessary [1]. There are numerous and well-known methods to increase the bandwidth of antennas, including increase of the substrate thickness, the use of a low dielectric substrate, the use of various impedance matching and feeding techniques and the use of multiple resonators [2-12]. To overcome the above problem, a multi-layer microstrip antenna structure with two rectangular slots on the rectangular patch which results in a typical mathematical plus symbol is proposed. This paper is a modification of [13] in which the feed was simple coaxial probe. An impedance bandwidth of 15% was investigated.

In this paper a printed wide-band stacked patch antenna for enhancing the bandwidth is presented. The lower plus shaped slotted driven patch is fed by a microstrip line and the upper square parasitic patch is electromagnetically coupled. The antenna is simulated using IE3D, 12.32 version of Zealand. The simulated results show that the impedance bandwidth has achieved a good match.

### Antenna Design

The dielectric constant of the substrate is closely related to the size and the bandwidth of the microstrip antenna. Low dielectric constant of the substrate produces larger bandwidth, while the high dielectric constant of the substrate results in smaller size of antenna. A trade-off relationship exists between antenna size and bandwidth [14]. The resonant frequency of microstrip antenna and the size of the radiation patch can be similar to the following formulas [15].

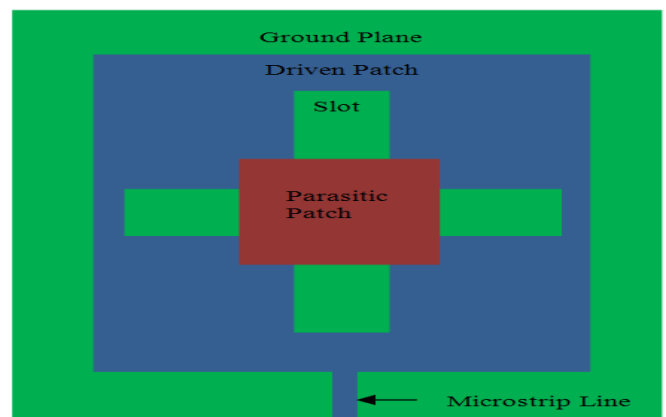


Fig. 1- Top view of the antenna.



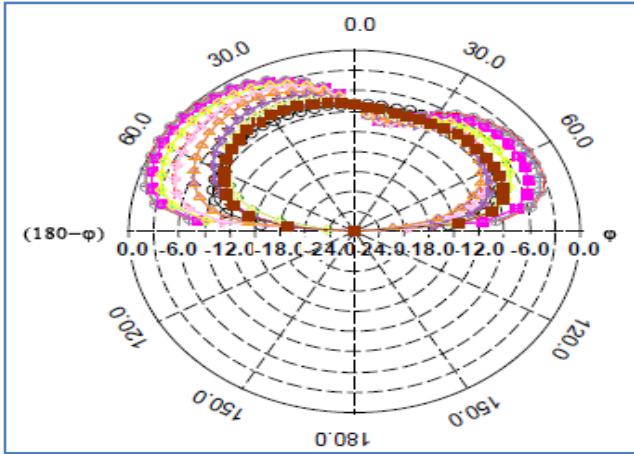


Fig. 6- Radiation pattern of the proposed antenna Elevation

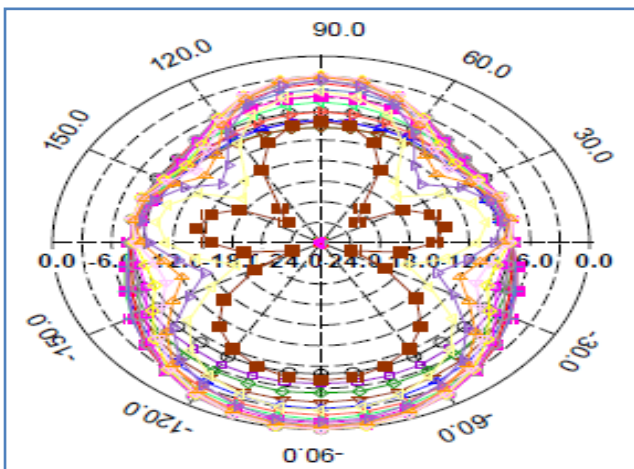


Fig. 7- Radiation pattern of the proposed antenna Azimuth

**Conclusion**

A compact, stacked and slotted microstrip patch antenna for enhancing the bandwidth has been designed and simulated successfully. Simulation results of a wideband microstrip patch antenna covering 2.052 GHz to 3.754 GHz frequency have been present. With the use of 50 Ω microstrip line feed the proposed microstrip patch antenna achieves an impedance bandwidth of 58.62% at -10 dB return loss. Good antenna performance and impedance matching can be realized by adjusting the length and width of microstrip line. It can be concluded from the results that the designed antenna has satisfactory performance and hence can be used for indoor wireless applications like Wi-max (2.2-3.4 GHz), WLAN (2.4-2.48 GHz) and UMTS II (2.5-2.69 GHz).

**References**

[1] Ramadan A., Kaban K.Y., El-Hajj A., Khoury S. and Al-usseini M. (2009) *Progress In Electromagnetics Research*, 93, 355-367.  
 [2] Tarange V., Gite T., Musale P. and Khobragade S.V. (2011) *Proc. IEEE*, 978-1, 182-184.  
 [3] Deshmukh A.A., Kadam A. and Ray K.P. (2011) *Proc. IEEE*, 978-1.  
 [4] Hariyadi T., Munir A. and Setiawan A.D. (2011) *Proc. IEEE*,

978-1.  
 [5] Zhang F., Zhang F.S., Lin C. and Zhao G. (2011) *Proc. IEEE*, 978-1, 388-391.  
 [6] Dastranj A. and Abiri H. (2010) *IEEE Transactions On Antennas And Propagation*, 58(4), 1402-1407.  
 [7] Islam M.T., Shakib M.N. and Misran N. (2009) *Progress In Electromagnetics Research*, 98, 163-173.  
 [8] Islam M.T., Shakib M.N. and Misran N. (2009) *Progress In Electromagnetics Research*, 95, 397-407.  
 [9] Duan Z.S., Qu S.B. and Zhang J.Q. (2009) *Electronics Letters*, 45(5).  
 [10] Palandoken M., Grede A. and Henke H. (2009) *IEEE Transactions On Antennas And Propagation*, 57(2), 331-338.  
 [11] Elhefnawy M. and Ismail W. (2009) *IEEE Transactions on Antennas And Propagation*, 57(12), 3998-4002.  
 [12] Yang S.L.S., Lee K.F. and Kishk A.A. (2008) *Progress In Electromagnetics Research*, 80, 45-61.  
 [13] Kushwaha R.S., Srivastava D.K., Saini J.P. (2012) *National Conference on Advances in Computer Communication and Embedded Systems*, MMMEC Gorakhpur, India, 147-149.  
 [14] Pozar D.M. (1992) *Proc. IEEE*, 80(1), 79-81.  
 [15] Shi X., Wang Z., Su H., Zhao Y. (2011) *Proc. IEEE*, 978-1, 7104-7106.  
 [16] Islam M.T., Nazbus M., Shakib., Misran N., Yatim B. (2008) *Proc. IEEE*, 758-761.  
 [17] Ren W. (2008) *Progress In Electromagnetics Research B*, 8 319-327.